

Tubiprint Exports


Brand Securing Globally

TUBIPRINT E-FILE
TECHNICAL DATA SHEET
AL-MYLAR TAPE

AL-MYLAR TAPE

Product Description

It's a composite tape of Aluminium Foil laminated with Mylar Tape with different thickness and widths.

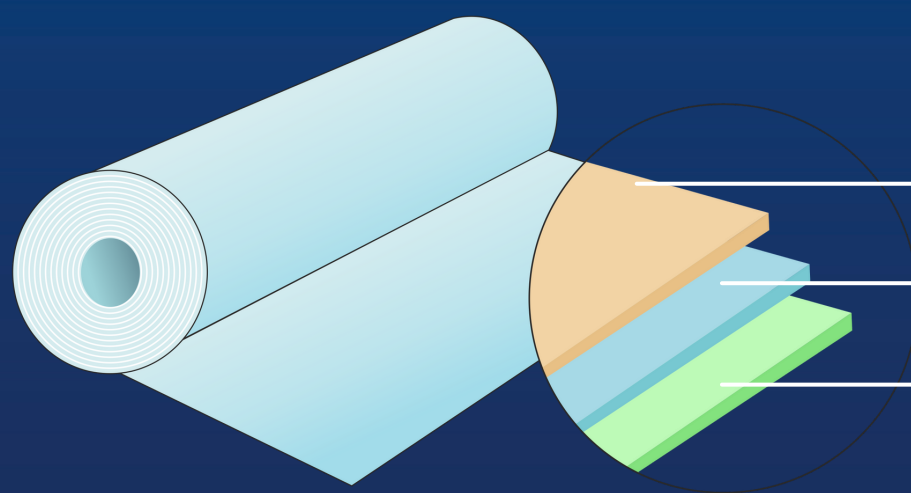

Aluminum Foil
High Bond Adhesive
Lamination
Mylar Film

Processing

The laminating of AL-Mylar Tape is a process through which aluminum foil and polyester film are joined together by adhesive lamination.

Application

Mostly used in coaxial cables, special cables, instrumentation cables, data cables, telecommunication cables, networking cables, signal cables, LAN cables etc.

Key Features:

- ✓ Different colors, used as EMI shielding or sheilding foil for cables which must be free of electromagnetic or electrostatic interference.
- ✓ Minimum width 8mm onwards.



TECHNICAL PARAMETER

STRUCTURE	THICKNESS	Weight (gr/m ²)	YEILD (m ² /kg)
Alu 9 + Pet 12	23	43	23
Alu 9 + Pet 15	26	48	21
Alu 9 + Pet 19	30	54	19
Alu 9 + Pet 23	34	60	17
Alu 12 + Pet 12	26	52	19
Alu 12 + Pet 15	29	56	18
Alu 12 + Pet 19	33	62	16
Alu 12 + Pet 23	37	67	15
Alu 12 + Pet 36	50	87	12
Alu 15 + Pet 19	36	70	14
Alu 25 + Pet 12	39	87	12
Alu 25 + Pet 23	50	102	10
Alu 40 + Pet 12	54	127	8
Alu 40 + Pet 15	57	131	8
Alu 40 + Pet 23	65	143	7
Alu 40 + Pet 36	78	161	6
Alu 50 + Pet 12	64	154	6
Alu 50 + Pet 15	67	158	6
Alu 50 + Pet 23	75	170	6
Alu 50 + Pet 36	88	188	5

Ref no. QAD TPEX S/10 - F1/2

*MD = MACHINE DIRECTION * TD = TRANSVERSE DIRECTION

STORAGE & HANDLING:

Al-Mylar need to be stocked in a closed warehouse and should not be exposed to direct sunlight or light sources and from humidity. It is recommended to store below 35 degree C in dry place. Our Al-Mylar is suitable for use within 18 months from the date of manufacturing only if the material is stored in recommended conditions.

DISCLAIMER

It is the responsibility of our customers to determine that their use of our product (s) is safe, lawful & technically suitable in their oriented applications. The values given in the technical data sheet represent typical values based on the best of our knowledge as on date was compiled. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability & compatibility in all respects. Tubiprint Exports gives no warrantee or accept liability for any loss and fitness of the product for any specific purpose. Tubiprint Exports reserves the right to change the technical data sheet at any time for enhancing the quality of the products.

CONTACT US:

H.O: BG5A/30A, PASCHIM VIHAR, NEW DELHI-110063. INDIA

PHONE NO: +91-9971238539 | +91-9311596234

Email : info@tubiprintexports.com